



TELEDYNE INSTRUMENTS
Advanced Pollution Instrumentation
A Teledyne Technologies Company

MODEL **100E**

UV Fluorescence SO₂ Analyzer



- ▶▶ **Standard two year warranty**
- ▶▶ **Ranges, 0-50 ppb to 0-20 ppm, user selectable**
- ▶▶ **Dual ranges and auto ranging**
- ▶▶ **Microprocessor controlled for versatility**
- ▶▶ **Multi-tasking software allows viewing test variables while operating**
- ▶▶ **Continuous self checking with alarms**
- ▶▶ **Dual bi-directional RS-232 ports for remote operation (optional RS-485 or Ethernet)**
- ▶▶ **Digital status outputs indicate instrument operating condition**
- ▶▶ **Adaptive signal filtering optimizes response time**
- ▶▶ **Temperature & Pressure compensation**
- ▶▶ **Internal Zero & Span check (optional)**
- ▶▶ **Internal data logging with 1 min to 365 day multiple averages**
- ▶▶ **Critical orifices provide flow stability**

EPA APPROVAL EQSA-0495-100
MCERTS certified Sira MC050067/00
EN Approval EN14212*

The Model 100E uses the proven UV fluorescence principle, coupled with state of the art microprocessor technology to provide accurate and dependable measurements of low level SO₂.

Exceptional stability is achieved with the use of an optical shutter to compensate for PMT drift and a reference detector to correct for changes in UV lamp intensity. A hydrocarbon "kicker" and advanced optical design combine to prevent inaccuracies due to interferences. The multi-tasking software gives real time indication of a large number of operational parameters and provides automatic alarms if diagnostic limits are exceeded.

All instruments of the TAPI E Series include an extensive built-in data acquisition capability using the analyzer's internal memory. This allows the logging of multiple parameters including averaged and instantaneous concentration values, calibration data and operating parameters such as flow, pressure and lamp intensity.

Stored data are easily retrieved through the serial port or optional Ethernet port via our APIcom software or from the front panel, allowing operators to perform predictive diagnostics and enhanced data analysis by tracking parameter trends.

The Model 100E combines lighter weight, rugged construction, ease of use, powerful diagnostics, modular design and outstanding performance to yield the ideal tool for today's air monitoring requirements.

FREE Customer Support by telephone and email for the life of the instrument



MODEL 100E UV Fluorescence SO₂ Analyzer


Specifications

Ranges:	0-50 ppb to 0-20,000 ppb full scale, user selectable. Dual ranges and auto ranging supported
Units:	ppb, ppm, µg/m ³ , mg/m ³
Zero Noise:	< 0.2 ppb (RMS)
Span Noise:	< 0.5% of reading (RMS) above 50 ppb
Lower Detectable Limit (LDL):	0.4 ppb
Zero Drift:	< 0.5 ppb/24 hours, 1 ppb/7 days
Span Drift:	< 0.5% of FS/24 hours, ≤1% of FS/7 days
Lag Time:	20 seconds
Rise and Fall Time:	< 100 seconds to 95%
Linearity:	1% of full scale
Precision:	0.5% of reading above 50 ppb
Sample Flow Rate:	650 cm ³ /min ±10%
Operating Temperature Range:	5 - 40°C (with EPA Equivalency)
Dimensions (HxWxD):	7" (178 mm) x 17" (432 mm) x 23.5" (597 mm)

Weight:	35 lbs (16 kg)
Power:	100V - 120V, 220V - 240V, 50/60 Hz, 250W
Analog Outputs:	10V, 5V, 1V, 0.1V, selectable
Recorder Offset:	±10%
Serial Outputs:	Serial Port 1: RS-232 (DB-9M) Serial Port 2: standard RS-232 or optional RS-485 (DB-9F), Ethernet
Status (Digital):	8 outputs, 6 inputs (opto-isolated), 6 alarm outputs (optional)
Current Output:	Optional 4-20mA, select up to three channels
Approvals:	USEPA EQSA-0495-100, MCERTS certified Sira MC050067/00 EN14212* Approved, CE and others

NOTE: The values expressed above are in accordance with EPA definitions. All error specifications are based on constant conditions. Specifications exceed US EPA and Eignungsgeprüft requirements.

Schematic

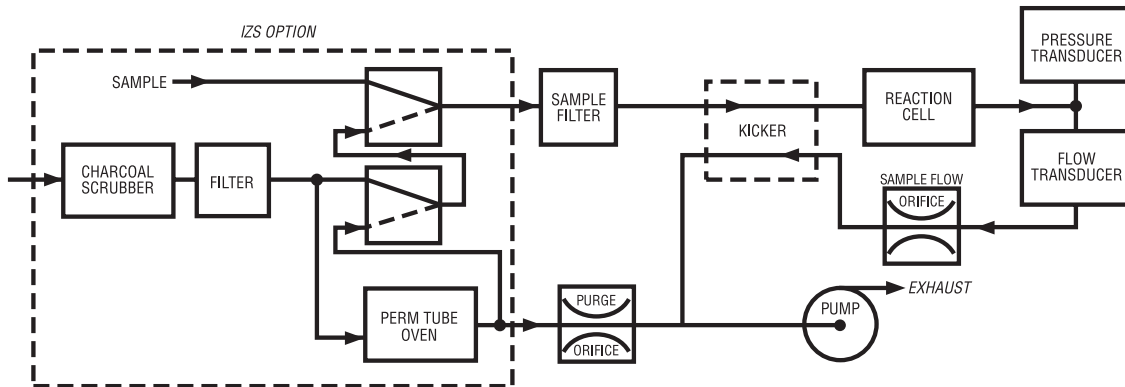

How to Order

Model 100E Fluorescence SO₂ Analyzer includes:

- Standard two year warranty
- Selectable voltage (specify below)
- Internal pump
- Auto ranging and dual ranges
- 47mm diameter particulate filter
- 8 isolated digital status outputs
- Dual bi-directional RS-232
- APLcom remote control software

Specify input AC voltage & frequency:

- 100V - 115V 50Hz
- 220V - 240V 60Hz

Specify output DC voltage:

- 10V 5V 1V 0.1V

Calibration Options:

- TFE valves for selection of customer-supplied zero and span gas
- Internal zero and permeation tube oven for calibration check. Requires perm tube (separate option)

Additional Options:

- Rack mount brackets (19") with chassis slides
- Rack mount brackets only
- 4-20mA outputs (specify up to three channels)

- Multi-drop RS-232 connection
- Ethernet port includes 7 ft. CAT-5 cable (disables one serial port)
- * NO_x optical filter (recommended for high NO_x applications)
*Required for EN14212 approved configuration

Accessories:

- RS-232 Cable
- Expendables Kit
- Spare Parts Kit

Specifications subject to change without notice. Printed documents are uncontrolled. SAL000001 A (DCN 5058) M100E/08/08/08.



TELEDYNE INSTRUMENTS
Advanced Pollution Instrumentation

A Teledyne Technologies Company

9480 Carroll Park Drive ■ San Diego, CA 92121-5201

Ph. 858-657-9800 Fax 858-657-9816

Email api-sales@teledyne.com

For more information about the Teledyne API family of monitoring instrumentation products, call us or visit our website at

www.teledyne-api.com

